

Narrowband Power Amplifier

RNP21040-50NPIN



Product Features

- GaN on SiC Narrowband High Power Amplifier
- 2100 ~ 2170MHz Operation Bandwidth
- 50W Typical P3dB
- 50% typical Power Efficiency at P3dB

Applications

- General Purpose



Package Type : DP-75

Description

The power amplifier module is designed for general purpose.

Operating frequency range is from 21100 ~ 2170 MHz.

Gallium Nitride on SiC technology is used and attached on an aluminum sub carrier.

Full in/out matching is already applied.

Improved thermal handling by patented technology.

Electrical Specifications @ T_{cc}=28°C; T=25°C; Z_s=Z_L=50Ω

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Bandwidth	MHz	2110	-	2170	-
Power Gain	dB	32	33	-	@ Pin=14dBm
Gain Flatness	dBpp	-	±1	±1.5	@ Pin=14dBm
Gain Variation vs Temperature	dB	-	±1	±2	-20°C to 60°C, @ Pin=14dBm
Output Power	dBm	46	47	-	@ Pin=14dBm
Power Added Efficiency	%	45	50	-	@ Pin=14dBm
Output Power	dBm	46.5	47.5	-	@ P3dB
Power Added Efficiency	%	47	52	-	@ P3dB
Input Return Loss	dB	-	-10	-6	@Pin=10dBm
Supply Voltage	V	27.5	28	30	V _{cc} (=V _{ds})
Quiescent Current consumption	A	-	0.5	0.6	-
On/Off Switching Time	uS	-	2	5	On : TTL "Low"
					Off : TTL "High" (300mA@Disable)
Shut Down or Switch On/Off TTL Voltage	V	0	-	0.5	On : TTL "Low"(Enable)
		2.5	5	5.5	Off : TTL "High"

Absolute Maximum Ratings

PARAMETER	UNIT	RATING
Operating Flange Temperature	°C	85
Input RF Power	dBm	18
Supply Voltage	V	30
Load Mismatch Value	-	3 : 1 @all load phase

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Temperature	°C	-20	-	60	Tc
Storage Temperature	°C	-40	-	105	Tstg
Shock & Vibration	MIL-STD-810G Method 514.6 ANNEX C				VI







* Input Signal Condition : CW 1-Tone

Typical Performance @ 25°C

Frequency	Test Condition : Fixed Input Power=14dBm				Test Condition : P3dB		
	Pout	Ids @Pout	Power Gain @Pout	Drain Efficiency @Pout	P3dB	Ids[A] @ Psat	Drain Efficiency @P3dB
	MHz	dBm	A	dB	%	dBm	A
2.11	47.61	3.91	33.61	52.73	47.61	3.89	53.00
2.12	47.60	3.97	33.60	51.71	47.59	3.93	52.20
2.13	47.57	4.03	33.59	50.58	47.61	4.01	21.36
2.14	47.54	4.06	33.62	49.91	47.54	3.96	51.16
2.15	47.43	4.02	33.57	49.15	47.57	3.99	51.11
2.16	47.51	3.95	33.65	50.94	47.59	3.89	52.77
2.17	47.39	3.82	33.82	51.21	47.53	3.77	53.61

Narrowband Power Amplifier

RNP21040-50NPIN

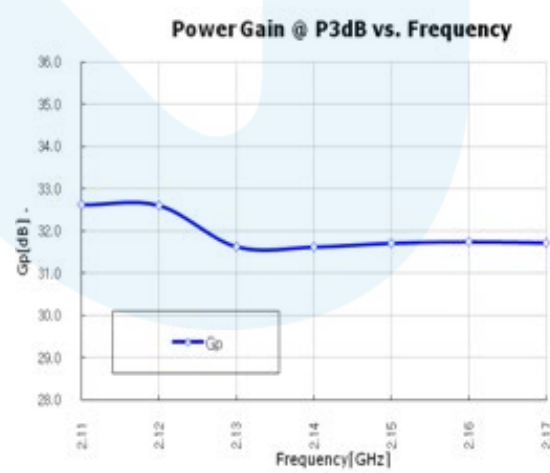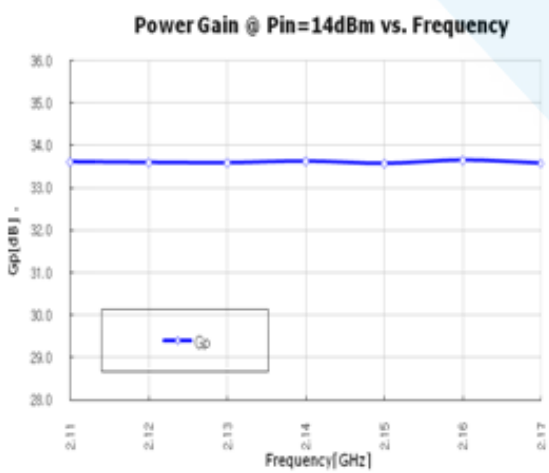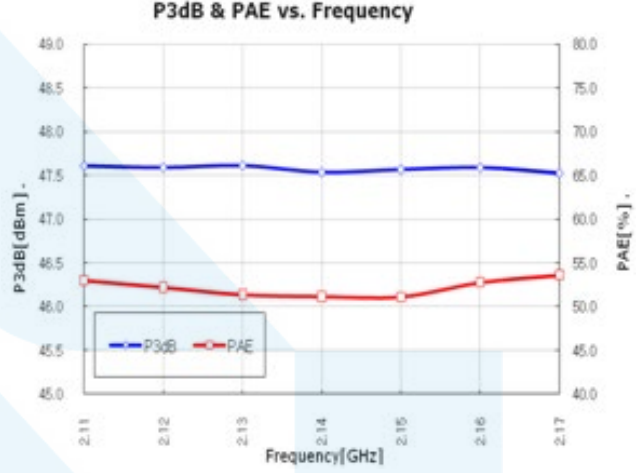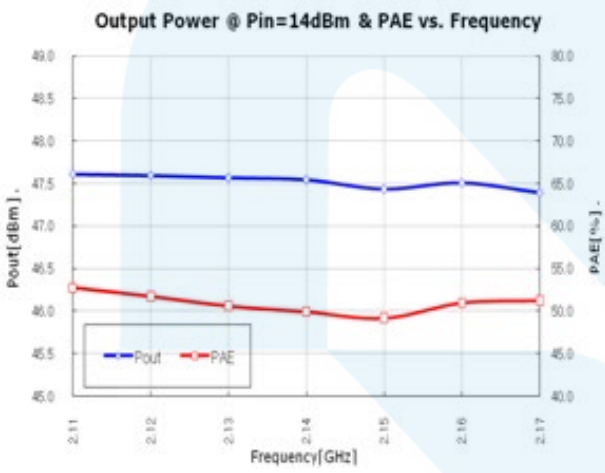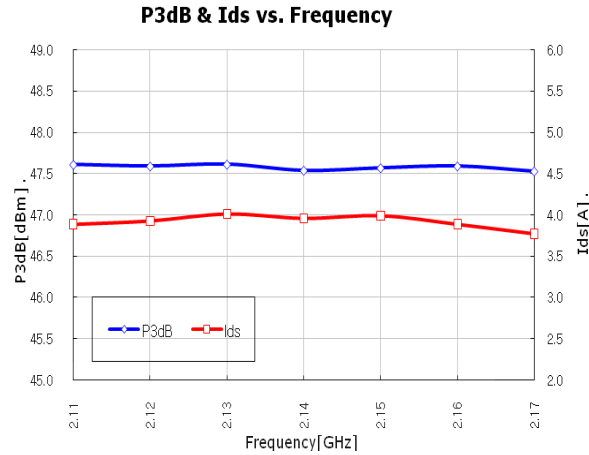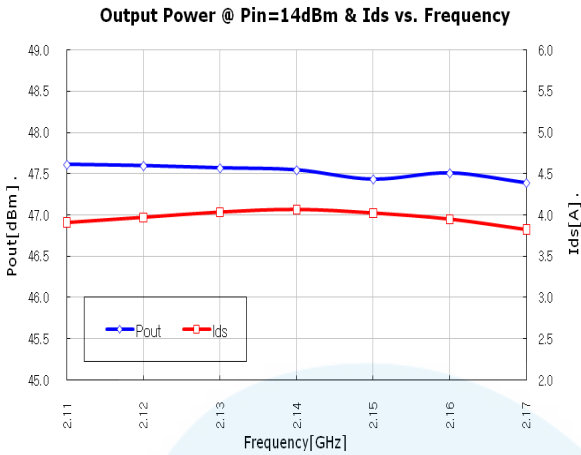


Precautions

1. This product is designed to be used for Narrowband amplification.
Heat generation is higher when there is no RF signal in the device. Therefore, the worst case scenario is when there is no RF signal, and the amplifier is “on” with current draw. The temperature must be calculated properly.
Case temperature must maintain below 85°C.
2. Thermal Grease or Metal Thermal Interface Materials are recommended for heat dissipation.
An example would be spreading thermal grease on the bottom of the device.


Package Dimensions (Type : DP-75)

* Unit: mm[inch] | Tolerance ± 0.3 [.012]

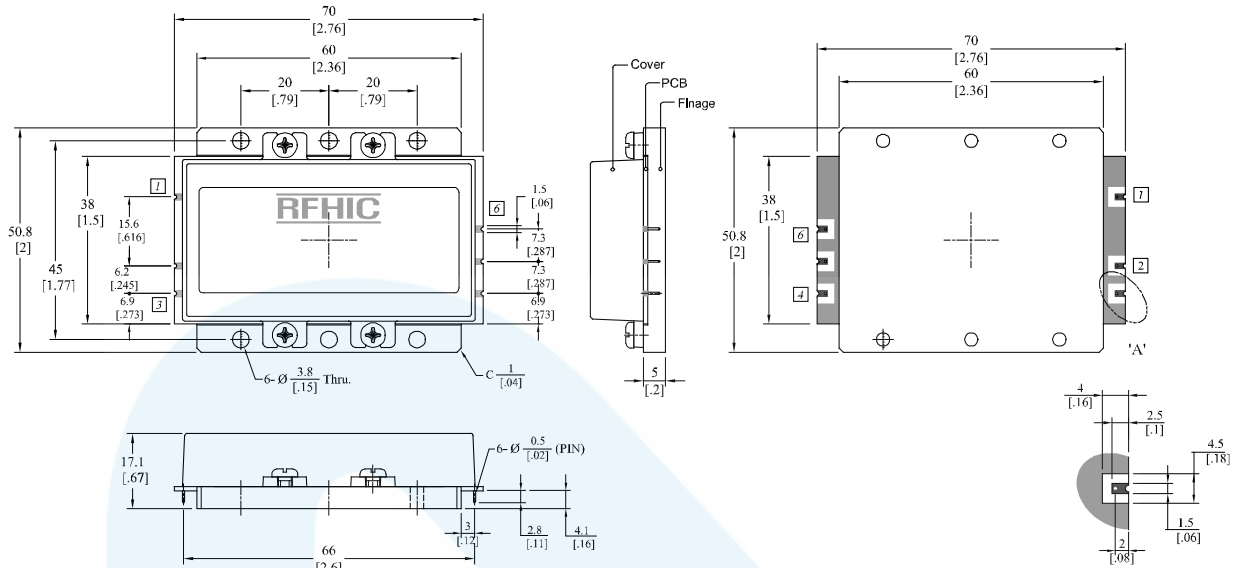

Pin Description			
Pin No	Function	Pin No	Function
1	RF IN	4	Switch ON/OFF
2	Vcc(+28V)	5	GND
3	Shut Down(+5V)	6	RF OUT

How to connected the package to a target PCB

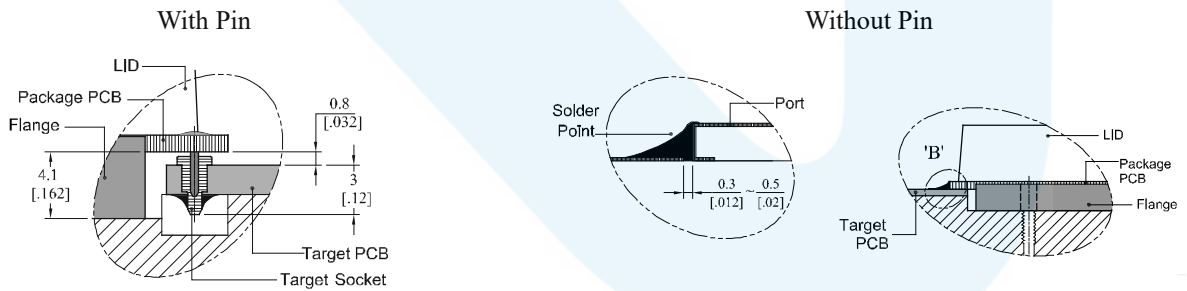

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RNP21040-50NPIN	2023.03.20	1.4	Non Pin Type Package	-
RNP21040-50	2019.07.18	1.3	Package Dimensions	-
RNP21040-50	2018.10.19	1.2	Modify Pout min.46.5dBm @P3dB	-
RNP21040-50	2016.04.08	1.1	On/Off Switching Time condition & Shut Down or Switch On/Off TTL Voltage condition	-



Certification

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect, and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use. All sales inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US sales team through our website at <https://rfhic.com/rfhic-us/>. For all other inquiries, please contact our international sales team through our website portal at <https://rfhic.com/contact/>